

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
8 July 2004 (08.07.2004)

PCT

(10) International Publication Number
WO 2004/057712 A1

(51) International Patent Classification:
G02B 6/34, H04B 10/17

H01S 3/30.

(74) Agents: GIANNESI, Pier, Giovanni et al.; Pirelli & C.
S.p.A., Viale Sarca, 222, I-20126 Milano (IT).

(21) International Application Number:
PCT/EP2002/014532

(22) International Filing Date:
19 December 2002 (19.12.2002)

(25) Filing Language: English

(26) Publication Language: English

(71) Applicant (for all designated States except US): PIRELLI
& C. S.P.A. [IT/IT]; Via Gactano Negri, 10, I-20123 Mi-
lano (IT).

(72) Inventors; and

(75) Inventors/Applicants (for US only): DE DONNO, Marco
[IT/IT]; Pirelli Labs S.P.A., Viale Sarca, 222, I-20126 Mi-
lano (IT). REPINGON, Alain [FR/IT]; Pirelli Labs S.P.A.,
Viale Sarca, 222, I-20126 Milano (IT).

(81) Designated States (national): AE, AG, AL, AM, AT, AU,
AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU,
CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH,
GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC,
LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW,
MX, MZ, NO, NZ, OM, PH, PL, PT, RO, RU, SD, SE, SG,
SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VN,
YU, ZA, ZM, ZW.


(84) Designated States (regional): ARIPO patent (GH, GM,
KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW),
Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM),
European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE,
ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, SI, SK,
TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ,
GW, ML, MR, NE, SN, TD, TG).

Published:

— with international search report

[Continued on next page]

(54) Title: MULTIPLE STAGE RAMAN OPTICAL AMPLIFIER

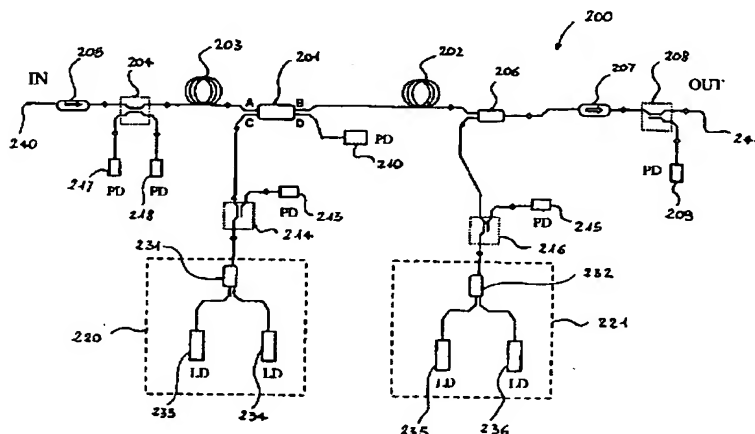

(57) Abstract: The invention relates to a multiple stage Raman amplifier including an interstage wavelength-selective pump combiner. Wavelength-selection characteristics are such that the pump combiner substantially blocks the passage of the pump signal of the first stage to the second stage and/or vice versa while allowing the passage of the transmission signal from the first stage to the second stage. The pump combiner substantially blocks different portions of the wavelength spectrum of the pump radiation which is fed into the pump combiner from different ports. The pump combiner preferably includes thin-film filters. The pump combiner has therefore the multiple function of coupling the pump signal of the first (or second) pump source and of isolating from one another the pump signals of the two amplification stages. This allows the reduction of the number of passive components present in a multistage optical amplifier, which in turn leads to a decrease of the overall insertion loss in the amplifier and shorter assembly processing.

WO 2004/057712 A1

BEST AVAILABLE COPY

WO 2007/057712 A1



For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

BEST AVAILABLE COPY